

Front/ Rear View


Front



Rear



Outward Appearance

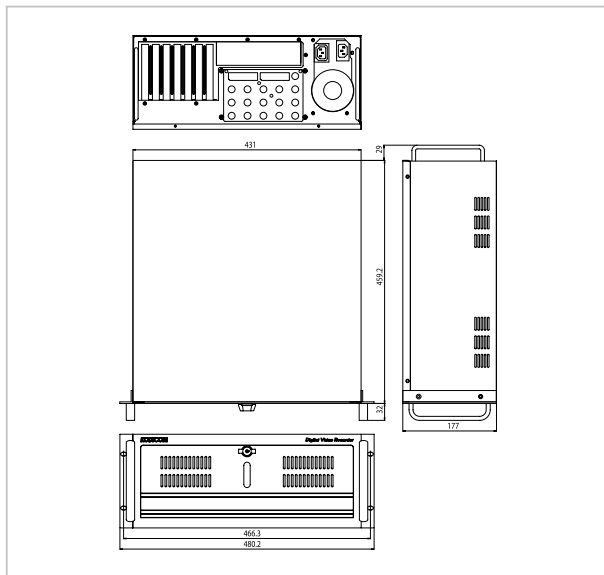

Functions by Screen



WATCH SCREEN

PTZ SCREEN

SEARCH SCREEN

Application

Some recommended installation areas are Security Companies, Change Booths, Casinos, Pawnshops, Jewelers, Galleries, Exhibition Halls, Department Stores, Convenience Stores, Discount Offices, Hospital, Police Stations, Subway Stations, Airports, Banks etc.

Features

- High Quality Realtime Display – Max. 240fps(NTSC) 200fps(PAL)
- High Quality and High Speed Recording – Max. 240fps(NTSC) 200(PAL)
- Various Resolutions on Display and Recording – 640×480, 320×240, 160×120(NTSC), 768×576, 384×288, 192×144(PAL)
- Modified MPEG4
- 1, 4, 6, 9, 16 Division
- Watchdog Function
- Kodicom, Pelco, Dennard, Bosch, Samsung and many more PTZ protocol included
- Watermark Function
- Remote Observation Through Network
- Emergency Screen Auto Transfer to Center Software
- User friendly Graphic User Interface

Specifications

| Model | | DN-45216 |
|----------------|--------------------------------|---|
| Display | Speed | NTSC : 240fps PAL : 200fps |
| | Screen Division | 1, 4, 6, 9, 13, 16 Division |
| Recording | Max. Speed (@ CIF) | NTSC : 240fps PAL : 200fps |
| | Resolution | NTSC : 640×480, 320×240, 160×120 PAL : 768×576, 384×288, 192×144 |
| | Recording Option | Continuous, Motion, Sensor and Pre-Alarm |
| Video | Format | NTSC/PAL |
| | CODEC | Modified MPEG4 |
| | Input | 16ch |
| | Output | VGA, Programmable spot out (3ch full) |
| System | OS | MS WINDOWS 2000 |
| Audio | Input | 1ch (MIC input) |
| | Output | 1ch |
| | CODEC | G. 726 (8KHz Mono) |
| Alarm | Input | 8 Ports |
| | Output | 8 Ports |
| Network | Transmission | LAN/PSTN/ISDN/XDSL/Leased Circuit |
| | Protocol | TCP/IP (support dynamic IP) |
| Backup | Device | USB, CD-RW (optional), Network, DVD-RW (optional) |
| Other Function | Remote Control | Remote Software (CMS) |
| | Remote Alarm | E-mail, CMS report |
| | PTZ | RS232C/485 |
| | W/D Function | Yes |
| | Image Authentication | Watermark |
| | Language | 17 Languages |
| | Password | Multi-Level User Password Authorization |
| | USB | 6 Port (USB 2.0) |
| | Working Temperature | 0°C ~ +50°C |
| Power Source | AC 100 ~ 240V, 50/60Hz | |
| Dimensions | 430mm(W) × 176mm(H) × 460mm(D) | |
| Weight(net) | 18Kg (39.6lbs) | |

※ Specifications subject to change without notice.