

Front/ Rear View


Front



Rear



Outward Appearance

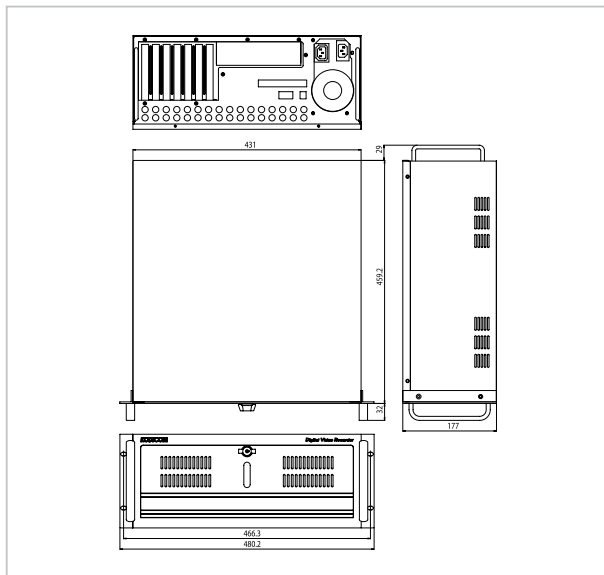

Functions by Screen



WATCH SCREEN

PTZ SCREEN

SEARCH SCREEN

Application

Some recommended installation areas are Security Companies, Change Booths, Casinos, Pawnshops, Jewelers, Galleries, Exhibition Halls, Department Stores, Convenience Stores, Discount Offices, Hospital, Police Stations, Subway Stations, Airports, Banks etc.

Features

- High Quality Realtime Display – Max. 480fps(NTSC) 400fps(PAL)
- High Quality and High Speed Recording – Max. 480fps(NTSC) 400(PAL)
- Various Resolutions on Display and Recording – 640×480, 320×240, 160×120(NTSC), 768×576, 384×288, 192×144(PAL)
- Modified MPEG4
- 1, 4, 6, 9, 10, 13, 16, 33, 36 Division
- Watchdog Function
- Watermark Function
- Kodicom, Pelco, Dennard, Bosch, Samsung and many more PTZ protocol included
- Remote Observation Through Network
- Emergency Screen Auto Transfer to Center Software
- User friendly Graphic User Interface

Specifications

Model		DN-68232
Display	Speed	NTSC : 480fps PAL : 400fps
	Screen Division	1, 4, 6, 9, 10, 13, 16, 33, 36 Division
Recording	Max. speed (@CIF)	NTSC : 480fps PAL : 400fps
	Resolution	NTSC : 640×480, 320×240, 160×120 PAL : 768×576, 384×288, 192×144
	Recording Option	Continuous, Motion, Sensor and Pre-Alarm
Video	Format	NTSC/PAL
	CODEC	Modified MPEG4
	Input	32ch
	Output	VGA, Programmable spot out (1ch full, 1ch division)
System	OS	MS WINDOWS 2000
Audio	Input	8ch (line input)
	Output	1ch
	CODEC	G. 726 (8KHz Mono)
Alarm	Input	16 Ports
	Output	16 Ports
Network	Transmission	LAN/PSTN/ISDN/XDSL/Leased Circuit
	Protocol	TCP/IP (support dynamic IP)
Backup	Device	USB, CD-RW (optional), Network, DVD-RW (optional)
Other Function	Remote Control	Remote Software (CMS)
	Remote Alarm	E-mail, CMS report
	PTZ	RS232C/485
	W/D Function	Yes
	Image Authentication	Watermark
	Language	17 Languages
	Password	Multi-Level User Password Authorization
	USB	6 Port (USB 2.0)
	Working Temperature	0°C ~ +50°C
Power Source	AC 100 ~ 240V, 50/60Hz	
Dimensions	430mm(W) × 176mm(H) × 460mm(D)	
Weight(net)	18.5Kg (40.7lbs)	

※ Specifications subject to change without notice.