








KSR 5 SERIES

KSR-516

World's Best Company in Digital Video Recording
Kodicom provides high quality display pictures with outstanding recording speed.



Main Functions

-  **REAL TIME MONITORING**
Simultaneous live images
-  **COMPACT PICTURE STORAGE**
Images are compressed to an average file size between 2~10Kb per picture using MPEG4 Algorithm
-  **EASY PICTURE RETRIEVAL**
Instant picture retrieval by date/time and camera number
-  **EVENT CONTROLLED RECORDING**
Reduces the amount of data and automatically records specific events
-  **REMOTE CONTROL**
Remote Control of PTZ cameras & other electronic devices
-  **PICTURE TRANSMISSION OVER NETWORK**
High quality picture transmission over PSTN, ISDN & LAN network
-  **MULTI SCREEN MONITORING**
1, 4, 9, 16 Split Screen available

Digital Video Recorder(Non-PC based)

KSR-516


Front/ Rear View



Features

- High Quality Realtime Display – Max. 480fps(NTSC) 400fps(PAL)
- High Quality and High Speed Recording – Max. 120fps(NTSC) 100(PAL)
- Various Resolutions on Display and Recording – 704×240, 352×240(NTSC), 704×288, 352×288(PAL)
- Modified MPEG4
- 1, 4, 9, 16 Division
- Watchdog Function
- Kodicom, Pelco, Dennard, Bosch, Samsung and many more PTZ protocol included
- Watermark Function
- Remote Observation Through Network
- Emergency Screen Auto Transfer to Center Software
- User friendly Graphic User Interface

Outward Appearance

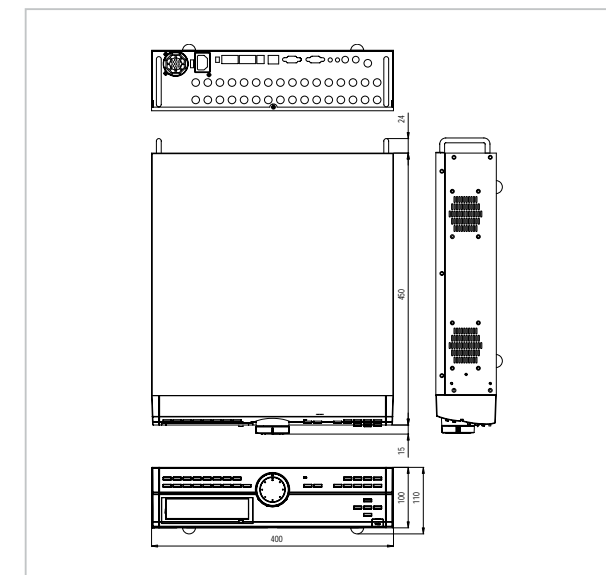

Functions by Screen



Application

Some recommended installation areas are Securities Companies, Change Booths, Casinos, Pawnshops, Jewelers, Galleries, Exhibition Halls, Department Stores, Convenience Stores, Discount Offices, Hospital, Police Stations, Subway Stations, Airports, Banks etc.

Specifications

Model		KSR-516
Display	Speed	NTSC : 480fps PAL : 400fps
	Screen Division	1, 4, 9, 16 Division
Recording	Max. Speed (@CIF)	NTSC : 120fps PAL : 100fps
	Resolution	NTSC : 704×240, 352×240 PAL : 704×288, 352×288
Video	Recording Option	Continuous, Motion, Sensor, Pre-Alarm
	Format	NTSC/PAL
	CODEC	Modified MPEG4
	Input	16ch
Audio	Output	VGA, CVBS, S-Video, Programmable spot out (3ch Quad)
	Input	1ch (line input)
Alarm	Output	1ch
	CODEC	G. 726(8KHz Mono)
Network	Input	4 Ports
	Output	4 Ports
Backup	Transmission	Ethernet (RJ45)
	Protocol	TCP/IP (support dynamic IP)
Other Function	Device	USB, CD-RW, Network, DVD-RW (optional)
	Remote Control	Remote Software(CMS)
	Remote Alarm	E-mail, CMS report
	PTZ	RS232C/485
	W/D Function	Yes
	Image Authentication	Watermark
	Language	10 Languages
Password	Multi-Level User Password Authorization	
USB	1 Port (USB 2.0)	
Working Temperature	0°C ~ +50°C	
Power Source	AC 100 ~ 240V, 50/60Hz	
Dimensions	400mm(W) × 100mm(H) × 465mm(D)	
Weight (net)	10.5Kg (23.1lbs)	

※ Specifications subject to change without notice.

RECORDERS

CAMERAS

ACCESSORIES