




SONY[®]


IPELA[™]

Surveillance Camera Housings & Accessories

Sony Network Video Monitoring / Surveillance Camera Housings

Category	Outdoor Housing								Indoor Housing					
Model														
IP rating	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	N/A	N/A	N/A	N/A	N/A	N/A
Dome Color	Clear	Tinted	Clear	Tinted	Clear	Tinted	Clear	Tinted	Clear	Tinted	Clear	Tinted	Clear	Tinted
Wireless*	No	No	Yes	Yes	No	No	Yes	Yes	No	No	No	No	No	No
Fan	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
Voltage input required into the enclosure	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	N/A	N/A	AC 24V	AC 24V	N/A	N/A
Voltage feeds to the cameras inside	AC 24V	AC 24V	AC 24V	AC 24V	DC 12V	DC 12V	DC 12V	DC 12V	N/A	N/A	DC 12V	DC 12V	N/A	N/A
Supported cameras	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30	SNC-RZ50	SNC-RZ50	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30
Features	<ul style="list-style-type: none"> Outdoor dome, UV protected Thermostatically controlled heater 24-hour fan operation for effective heating and condensation protection Optically correct polycarbonate lower dome Choice of clear or tinted lower dome Pendant mount, 1/2" NPT quick connect coupling 								<ul style="list-style-type: none"> Indoor dome Optically correct polycarbonate lower dome Choice of clear or tinted lower dome Pendant mount, 1/2" NPT quick connect coupling 					

* Wireless: To be used with SNCA-CFW1 / SNCA-CFW5 wireless card; and can be used with SNCA-AN1 or other user provided antenna (All sold separately).

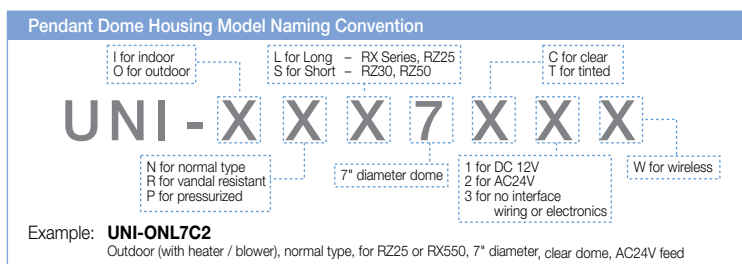

Pendant Mount Mini Dome Bracket


- Gooseneck wall mount bracket included
- 1" NPT
- Gooseneck wall mount installs directly to wall or UNI-PMA1, UNI-CMA1, UNI-PBU1
- Die-cast aluminum construction on Mini Dome adaptor

Sony Network Video Monitoring / Surveillance Camera housings

Category	Outdoor Pressurized Housing				Outdoor Vandal Resistant Housing							
Model												
	UNI-OPL7C2	UNI-OPL7T2	UNI-OPS7C1	UNI-OPS7T1	UNI-ORL7C2	UNI-ORL7T2	UNI-ORL7C2W	UNI-ORL7T2W	UNI-ORS7C1	UNI-ORS7T1	UNI-ORS7C1W	UNI-ORS7T1W
IP rating	IP67	IP67	IP67	IP67	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Dome Color	Clear	Tinted	Clear	Tinted	Clear	Tinted	Clear	Tinted	Clear	Tinted	Clear	Tinted
Wireless*	No	No	No	No	No	No	Yes	Yes	No	No	Yes	Yes
Fan	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Voltage input required into the enclosure	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V	AC 24V
Voltage feeds to the cameras inside	AC 24V	AC 24V	DC 12V	DC 12V	AC 24V	AC 24V	AC 24V	AC 24V	DC 12V	DC 12V	DC 12V	DC 12V
Supported cameras	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30	SNC-RZ50	SNC-RZ50
Features	<ul style="list-style-type: none"> • Pressurized outdoor dome, UV protected • Eliminates condensation, bugs and other debris • Great corrosion protection, perfect for coast lines, and other extreme environmental conditions • 5-7 psi pressure relief valve • Thermostatically controlled heaters • 24-hour fan operation for effective heating and condensation protection • Optically correct polycarbonate, clear or tinted lower dome • Pendant mount, 1 1/2" NPT quick connect coupling 				<ul style="list-style-type: none"> • Outdoor dome, UV protected • Strong cast aluminum top and trim ring • Rugged polycarbonate lower dome • Thermostatically controlled heaters • 24-hour fan operation for effective heating and condensation protection • Optically correct polycarbonate lower dome • Pendant mount, 1 1/2" NPT quick connect coupling 							

* Wireless: To be used with SNCA-CFW1 / SNCA-CFW5 wireless card; and can be used with SNCA-AN1 or other user provided antenna (All sold separately).

Power Block Unit



- AC 220V/110V input, 84va capacity
- Rugged outdoor NEMA box
- AC 24V output for camera, heater and blower
- Fused protected output
- Hinged door for easy access
- UNI-WMB1, UNI-MDB1, UNI-MB2 mounts directly to hinged door

Other Accessories



- UNI-MDB1**
Pendant Mount Mini Dome Bracket for SNC-DF70 and SSC-CD73V
- UNI-MDB2**
Pendant Mount Mini Dome Bracket for SNC-DF80



- UNI-WMB1**
Aluminum gooseneck wall mount, white finish




- UNI-RMB1**
Aluminum parapet mount, white finish

Sony Network Video Monitoring / Surveillance Camera housings

Category	Indoor Vandal Resistant Housing						Outdoor Fixed Camera Housing	Indoor Fixed Camera Housing	Recessed Ceiling Housing			
Model	 UNI-IRL7C2	 UNI-IRL7T2	 UNI-IRS7C1	 UNI-IRS7T1	 UNI-IRS7C3	 UNI-IRS7T3	 SNC-UNIHB/1	 SNC-UNI	 SIRM7CN	 SIRM7TN	 SNC-ID7C1	 SNC-ID7T1
IP rating	N/A	N/A	N/A	N/A	N/A	N/A	IP54	N/A	N/A	N/A	N/A	N/A
Dome Color	Clear	Tinted	Clear	Tinted	Clear	Tinted	N/A	N/A	Clear	Tinted	Clear	Tinted
Wireless*	No	No	No	No	No	No	No	No	No	No	No	No
Fan	No	No	No	No	No	No	Yes	No	No	No	No	No
Voltage input required into the enclosure	N/A	N/A	AC 24V	AC 24V	N/A	N/A	AC 24V	N/A	N/A	N/A	N/A	N/A
Voltage feeds to the cameras inside	N/A	N/A	DC 12V	DC 12V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Supported cameras	SNC-RX Series, SNC-RZ25	SNC-RX Series, SNC-RZ25	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30	SNC-RZ50, SNC-RZ30	SNC-CS50, SNC-CS11, SNC-CS10, SNC-Z20	SNC-CS50, SNC-CS11, SNC-CS10, SNC-Z20	SNC-RX Series	SNC-RX Series	SNC-RZ50, SNC-RZ30, SNC-RZ25	SNC-RZ50, SNC-RZ30, SNC-RZ25
Features	<ul style="list-style-type: none"> Indoor dome Strong cast aluminum top and trim ring Rugged polycarbonate lower dome Optically correct, clear or tinted lower dome Pendant mount, 1¹/₂" NPT quick connect coupling 						<ul style="list-style-type: none"> Extruded aluminum housing Tamper resistant camera housing lock down screws provided High strength steel wall mount bracket included Outdoor models include AC 24V heater and blower 		<ul style="list-style-type: none"> Extruded aluminum housing Tamper resistant camera housing lock down screws provided High strength steel wall mount bracket included 		<ul style="list-style-type: none"> 7" diameter dome indoor recessed ceiling housing No electronics. Interface wiring (ethernet, sensor I/O, power provided by user) 	

* Wireless: To be used with SNCA-CFW1 / SNCA-CFW5 wireless card; and can be used with SNCA-AN1 or other user provided antenna (All sold separately).



UNI-PBU1

Power Block Unit for UNI-WMB1, UNI-MDB1, and UNI-MDB2



UNI-CMA1

Aluminum corner mount adaptor, white finish (Used with UNI-WMB1, UNI-MDB1, and UNI-MDB2)



UNI-PMA1

Aluminum existing pole mount adaptor, white finish (Used with UNI-WMB1, UNI-MDB1, and UNI-MDB2)

Distributed by

©2009 Sony Corporation of Hong Kong Ltd. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice. All non-metric weights and measurements are approximate. Sony and IPELA are trademarks of Sony Corporation. All other trademarks are the property of their respective owners.